


Multiplexed Seven Segment Display Module (Common Cathode)

www.eXtremeElectronics.co.in

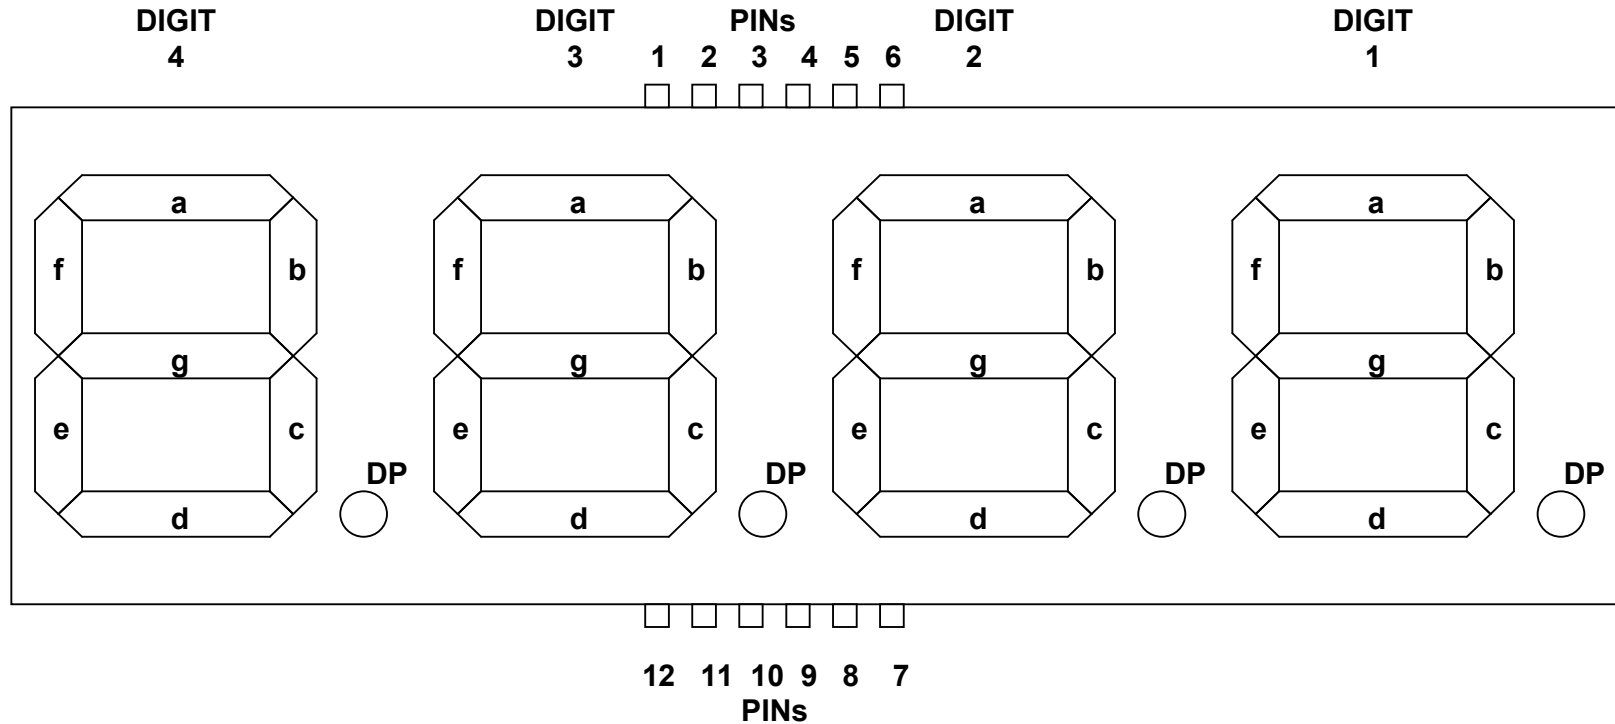

PIN Number:	1	2	3	4	5	6
Function:	S4	a	f	S3	S2	b
PIN Number:	7	8	9	10	11	12
Function:	S1	g	c	DP	d	e

S1 to S4 select individual digits. (Apply Cathode)
 a, b, c, d, e, f, g, DP connects to respective segments (Apply Anode)
 Note that segment 'a' of all four displays are connected in parallel.
 Same applies for segments 'b', 'c', 'd', 'e', 'f', 'g' and 'DP'
 DP=Decimal Point.

